

Easy access to hydraulic components.

**PRB20**


**PRESSES**

Pressure gauge protected inside the frame. It is positioned at eye level to assist for easy reading. Supplied fully assembled and ready for work. Set of two V blocks included and legs with boltholes for fixing to the floor. Workbench adjustable for height.




Manual screw extension for quick approach and fine adjustment.

Legs with bolt holes for fixing to the floor or mounting of wheels. Removable tray. (See previous page)

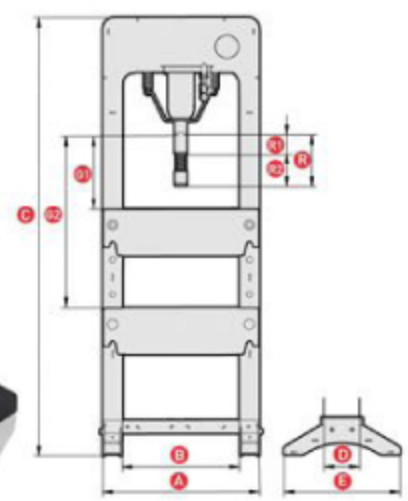

CAPACITY (t)	20	30
A	670	670
B	530	530
C	1850	1850
D	132	132
E	488	488
G1 Minimum	12	53
G2 Maximum	762	740
R1 Hydraulic stroke	150	150
R2 Extension stroke	75	75
R Total stroke	225	225
Weight (kg)	100	104
REFERENCES	<b>PRB20</b>	<b>PRB30</b>

Measures in mm.

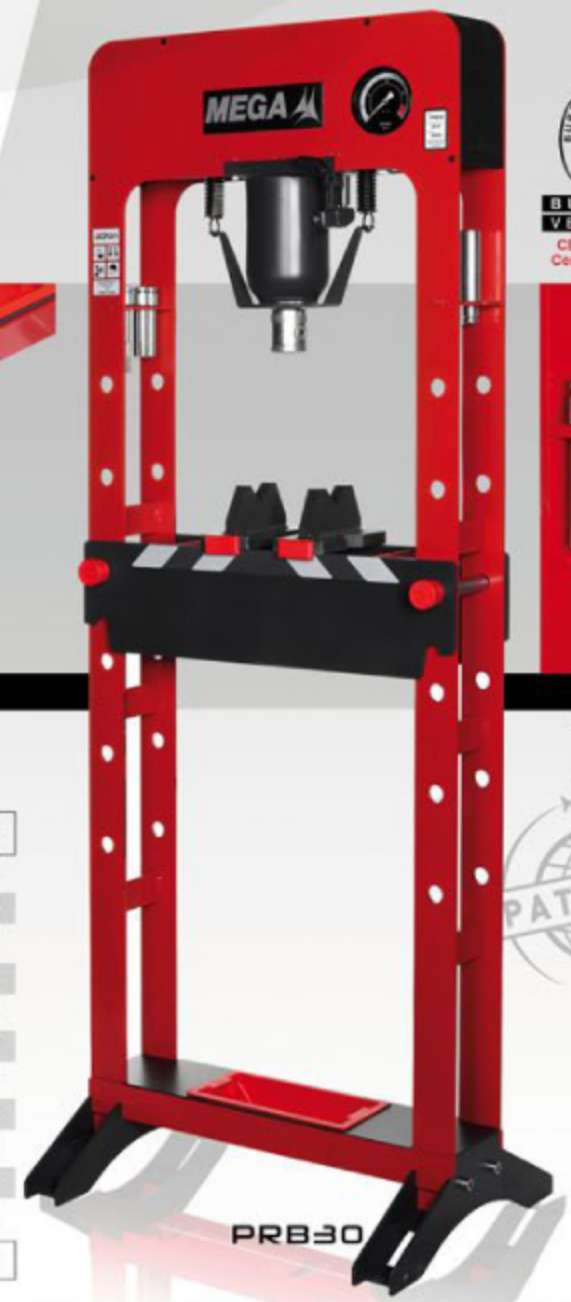

**PRB30**



Set of punches. Optional.

